

Leica DISTO™ D2 Laser Distance Meter

Lightweight. Compact. Powerful.



Now with Bluetooth®, a fully integrated intelligent endpiece, a bright white display and an ISO certified measuring engine that drives ± 1.5 mm accuracy and 100 metre measuring range. The Leica DISTO™ D2 is a 7 measurement mode LDM accurate to ± 1.5 mm. It features an intuitive back-lit LCD display in a 100g package that is small enough to fit in your pocket.

Use Bluetooth® to send measurements into apps running on mobile devices. The D2 measures from its base by default and can be configured to measure from the front.

Flip out the intelligent endpiece to 90° to hook onto outside corners or extend the endpiece fully for inside corners. The D2 will automatically measure from the end of its flip-out endpiece when fully extended. Combined with the Min/Max function, the endpiece allows you to get the tool all the way into corners for accurate diagonal measurements.

The D2 calculates area and volume, and remembers the last 10 measurements taken. Use the Add/Subtract capability to combine measurements to get a precise reading of the total wall area of a room (aka "the painter function").

The D2 includes a Pythagoras function for indirect height or width measurements. However, in a tool this size that cannot be mounted to a tripod we recommend using the Pythagoras for estimates or rough measurements. If you need precise indirect measurements, an LDM with a tilt sensor is your best bet.

Multifunctional end piece

Whether you are taking measurements from corners, grooves or edges, with the multifunctional end piece you can always accurately position the Leica DISTO™ D2. The position of the end piece is automatically detected and taken into account. This prevents expensive measuring errors.



Versatile thanks to useful measuring functions

Functions such as addition and subtraction, area and volume calculations make every measurement task child's play. The instrument stores the last 10 measurement results.




BAMR (Pty) Ltd, PO Box 23973, Claremont, 7735, South Africa
 Ph : 27 (0)21 683 2100, Fax : 27 (0)21 674 1485
 Email : sales@bamr.co.za Web : www.bamr.co.za

Technical Specifications

Measuring Accuracy	± 1.5 mm
Range (From about 80 m, use target plate)	0.2 to 100m
X-Range Power Technology	Y
Distance in m	10, 50, 100 m
Diameter of laser dot in mm	6, 30, 60 mm
Memory	10 results
Time delay release (timer)	Y
Display illumination	Y
Free software for Windows	Y
Free App	IOS / Android
Data interface*	Bluetooth SMART
Measurements per set of batteries	up to 10,000
Service life of battery	up to 20 hours
Multifunctional end-piece	Y
Batteries	AAA 2x1.5V
Protection class	IP54
Dimensions	116x44x26mm
Weight with batteries	100g



Bluetooth® Smart and Leica DISTO™ Sketch app

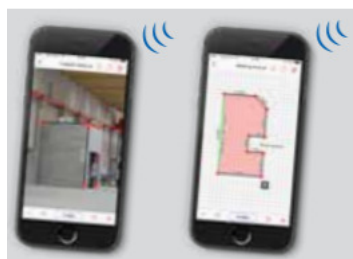

Extended functionality by pressing a button

The smart App “Leica DISTO™ sketch” is the ideal link between the Leica DISTO™ with Bluetooth® Smart and a smartphone or a tablet. It allows you to create and precisely dimension sketches and pictures. The files can then be sent directly to the office. This simplifies and speeds up work flow.



Which instrument is the right one for me?



Technical Data	D1	D110	D2	X310	D410	D510	D810 touch	S910
Distance measurement	40m	60m	100m	120m	150m	200m	200m	300m
Minimum/maximum measurements	-	-	Y	Y	Y	Y	Y	Y
Area / volume measurements	-	Area	Y	Y	Y	Y	Y	Y
Triangle/room angle function	-	-	-	Y	-	Y	Y	Y
Painter function	-	-	Y	Y	Y	Y	Y	Y
Trapezium function	-	-	-	-	-	Y	Y	Y
Pythagoras functions	-	-	Y	Y	Y	Y	Y	Y
Tilt measurement	-	-	-	360°	-	360°	360°	360°
Smart Horizontal Mode	-	-	-	Y	Y	Y	Y	Y
Sloped object measurement	-	-	-	-	-	Y	Y	Y
Height tracking	-	-	-	Y	-	Y	Y	Y
Height profile measurements	-	-	-	-	-	Y	Y	Y
Stake-out function	-	-	a/a	a/b	a/b	a/b	a/b	a/b
Subtraction/addition	-	-	Y	Y	Y	Y	Y	Y
Pointfinder with 4x zoom	-	-	-	-	Y	Y	Y	Y
Camera function	-	-	-	-	-	-	Y	Y
Measure with the picture	-	-	-	-	-	-	Y	Y
Timer	-	-	Y	Y	Y	Y	Y	Y
Personalised favourites	-	-	-	-	Y	Y	Y	Y
Touch screen	-	-	-	-	-	-	Y	Y
Compass	-	-	-	-	-	-	Y	Y
Point-to-Point measurements	-	-	-	-	-	-	-	Y
Smart angle measurement	-	-	-	-	-	-	-	Y
Smart area measurement	-	-	-	-	-	-	-	Y
DXF data capture	-	-	-	-	-	-	-	Y
WLAN data transmission	-	-	-	-	-	-	-	Y
Bluetooth Smart	Y	Y	Y	-	-	Y	Y	Y



Distance Meter Specifications



Technical Data

	D1	D110	D2	X310
Measuring Accuracy	± 2.0 mm	± 2.0 mm	± 1.5 mm	± 1.0 mm
Range (From about 80 m, use target plate)	0.2 to 40m	0.2 to 60m	0.2 to 100m	0.05 to 120m
Power Range Technology	-	-	-	Y
X-Range Power Technology	Y	Y	Y	-
Distance in m	10 m	10, 50 m	10, 50, 100 m	10, 50, 100 m
Diameter of laser dot in mm	6 mm	6, 30 mm	6, 30, 60 mm	6, 30, 60 mm
Tilt sensor - Measuring Range	-	-	-	360°
Tilt sensor - Accuracy to the laser beam	-	-	-	±0.2°
Tilt sensor - Accuracy to the housing	-	-	-	±0.3°
Units in tilt sensor	-	-	-	0.0°, 0.0%
Smart Base Measuring Range - Horizontal	-	-	-	-
Smart Base Measuring Range - Vertical	-	-	-	-
Distance in m	-	-	-	-
Typical Tolerance of the P2P function	-	-	-	-
Levelling range	-	-	-	-
Levelling accuracy	-	-	-	-
Pointfinder with 4x zoom	-	-	-	-
Overview camera	-	-	-	-
Picture file format	-	-	-	-
Memory	-	-	10 results	20 displays
Memory for pictures	-	-	-	-
CAD data format	-	-	-	-
Memory for CAD files	-	-	-	-
Time delay release (timer)	-	-	Y	Y
Display illumination	Y	Y	Y	Y
Free software for Windows	Y	Y	Y	-
Free App	IOS / Android	IOS / Android	IOS / Android	-
Data interface*	Bluetooth SMART	Bluetooth SMART	Bluetooth SMART	-
Measurements per set of batteries	up to 10,000	up to 10,000	up to 10,000	up to 5,000
Service life of battery	up to 20 hours	up to 20 hours	up to 20 hours	up to 10 hours
Multifunctional end-piece	-	-	Y	Y
Tripod thread	-	-	-	Y
Batteries	AAA 2x1.5V	AAA 2x1.5V	AAA 2x1.5V	AAA 2x1.5V
Charging time	-	-	-	-
Protection class	IP54	IP54	IP54	IP65
Dimensions	115x43.5x23.5mm	120x37x23mm	116x44x26mm	122x55x31mm
Weight with batteries	87g	92g	100g	155g





Technical Data

	D410	D510	D810 touch	S910
Measuring Accuracy	± 1.0 mm	± 1.0 mm	± 1.0 mm	± 1.0 mm
Range (From about 80 m, use target plate)	0.05 to 150m	0.05 to 200m	0.05 to 200m	0.05 to 300m
Power Range Technology	Y	Y	Y	
X-Range Power Technology				Y
Distance in m	10, 50, 100 m	10, 50, 100 m	10, 50, 100 m	10, 50, 100 m
Diameter of laser dot in mm	6, 30, 60 mm	6, 30, 60 mm	6, 30, 60 mm	6, 30, 60 mm
Tilt sensor - Measuring Range	-	360°	360°	360°
Tilt sensor - Accuracy to the laser beam	-	+0.2°	-0.1° / +0.2°	-0.1° / +0.2°
Tilt sensor - Accuracy to the housing	-	±0.2°	±0.1°	±0.1°
Units in tilt sensor	-	0.0°, 0.00%	0.0°, 0.00%	0.0°, 0.00%
Smart Base Measuring Range - Horizontal	-	-	-	360°
Smart Base Measuring Range - Vertical	-	-	-	-40° to 80°
Distance in m	-	-	-	2, 5, 10m
Typical Tolerance of the P2P function	-	-	-	2, 5, 10mm
Levelling range	-	-	-	±5°
Levelling accuracy	-	-	-	±0.05°
Pointfinder with 4x zoom	Y	Y	Y	Y
Overview camera	-	-	Y	Y
Picture file format	-	-	.jpg	.jpg
Memory	30 displays	30 displays	30 displays	50 displays
Memory for pictures	-	-	80 Photos	80 Photos
CAD data format	-	-	-	.dxf
Memory for CAD files	-	-	-	20 files, 30 points ea
Time delay release (timer)	Y	Y	Y	Y
Display illumination	Y	Y	Y	Y
Free software for Windows	-	-	Y	Y
Free App	-	IOS / Android	IOS / Android	IOS / Android
Data interface*	-	Bluetooth SMART	Bluetooth SMART	Bluetooth SMART, WLAN
Measurements per set of batteries	up to 5,000	up to 5,000	up to 4,000	up to 4,000
Service life of battery	up to 10 hours	up to 10 hours	up to 8 hours	up to 8 hours
Multifunctional end-piece	Y	Y	Y	-
Tripod thread	Y	Y	Y	Smart Base
Batteries	AA 2x1.5V	AA 2x1.5V	Li-ion rechargeable	Li-ion rechargeable
Charging time	-	-	4h	4h
Protection class	IP65	IP65	IP54	IP54
Dimensions	143x58x29mm	143x58x29mm	164x61x31mm	164x61x32mm
Weight with batteries	198g	198g	238g	290g

